


Flared end sections are required

Notify Public Works at least 24 hours prior to installation. (652-6940)

Public Works will establish pipe size and grade.

Culverts to be installed by property owner according to plans approved by Public Works Dept. Culverts improperly installed will be considered a violation of the Right-of-Way Encroachment Ordinance.

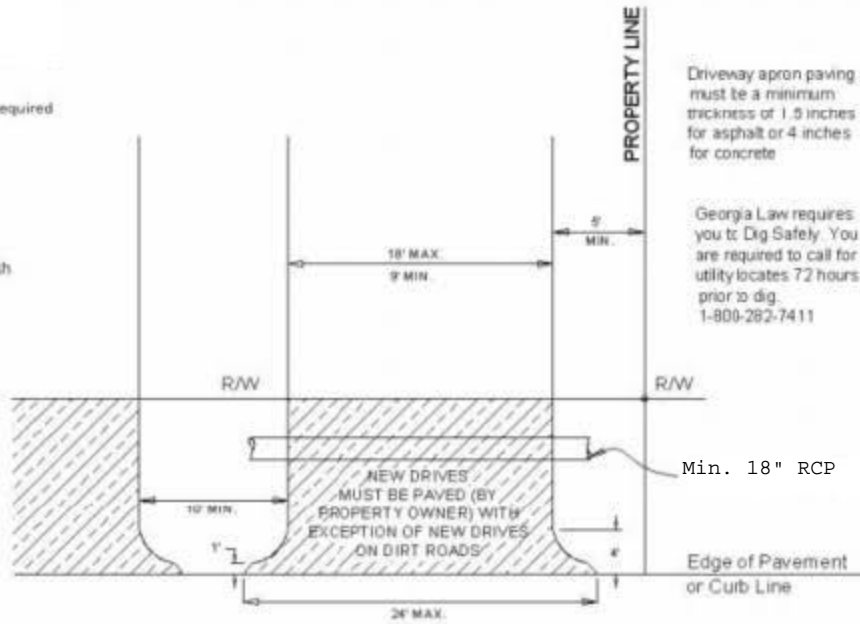


Driveway apron paving must be a minimum thickness of 1.5 inches for asphalt or 4 inches for concrete

Georgia Law requires you to Dig Safely. You are required to call for utility locates 72 hours prior to dig. 1-800-282-7411

Min. 18" RCP

Edge of Pavement or Curb Line

RESIDENTIAL DRIVE-LOCAL STREET
N.T.S.

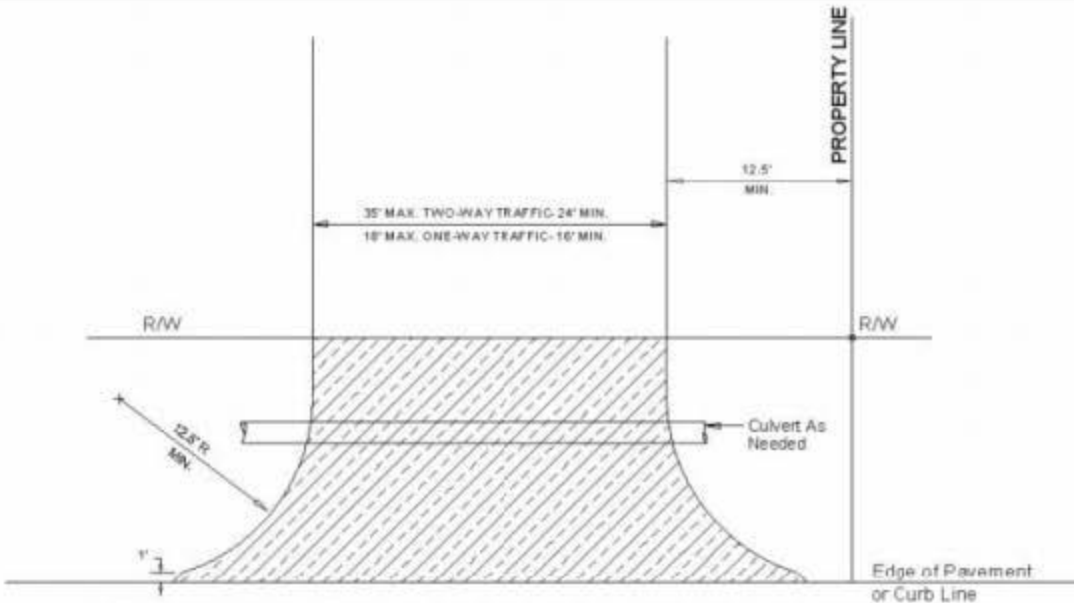

NOTE: DRIVEWAYS & CULVERTS (INCL. END TREATMENTS) SHALL BE INSTALLED BY PROPERTY OWNER IN ACCORDANCE WITH PLANS APPROVED BY COUNTY ENGINEER.

COMMERCIAL DRIVE
N.T.S.

APPENDIX "A"-COUNTY ENGINEERING POLICY

For further information, refer to Article III, Section B of the Engineering Policy



RESIDENTIAL & COMMERCIAL DRIVEWAYS

CHATHAM COUNTY
ENGINEERING OFFICE